



ELECTRIC

50L
250L
315L

DELIVERY

1 - 6

PEOPLE

10
YEAR

CYLINDER
WARRANTY¹

Indoor/
Outdoor

INSTALLATION

New Everhot Stainless Steel Electric water heaters offer energy efficiency, the purity of a stainless steel cylinder and reduced lifetime service costs while also being easier to install as they are much lighter than a traditional steel cylinder unit.

FEATURES

- Available in 50L, 250L and 315L capacities to suit most applications
- Up to 19% better than MEPS² reducing energy use to save you money
- Stainless steel cylinder and fittings resist corrosion for longer, extending product life
- Up to 40% lighter³ for easier handling
- No anode, to reduce lifetime maintenance costs
- Hi-temp 80°C thermostat (50L only)
- Dual handed fittings for easier installation (50L only)
- 10 Year cylinder warranty¹

WHY CHOOSE EVERHOT STAINLESS STEEL

- Made in Australia by Rheem manufacturing
- Capacities to suit most family sizes and hot water requirements
- Mains pressure hot water delivery
- Full warranty backing through a national service network



THE STAINLESS STEEL ADVANTAGE


The stainless steel cylinder in these Everhot Electric models offer many benefits vs traditional vitreous enamelled steel cylinders.

- Can resist corrosion for longer than traditional steel cylinders
- No sacrificial anode, reducing lifetime service costs
- Up to 40% lighter³ than comparable size vitreous enamel steel cylinders, for easier handling and installation
- Better energy efficiency (up to 19% better than MEPS)²
- Higher temperature settings are possible, for even hotter water


Everhot Stainless Steel water heaters are not recommended for installation in some areas.

Refer to www.reece.com.au/everhot for details of areas not recommended and where, if installed, product is not covered by warranty.

Everhot SS 250L & 315L

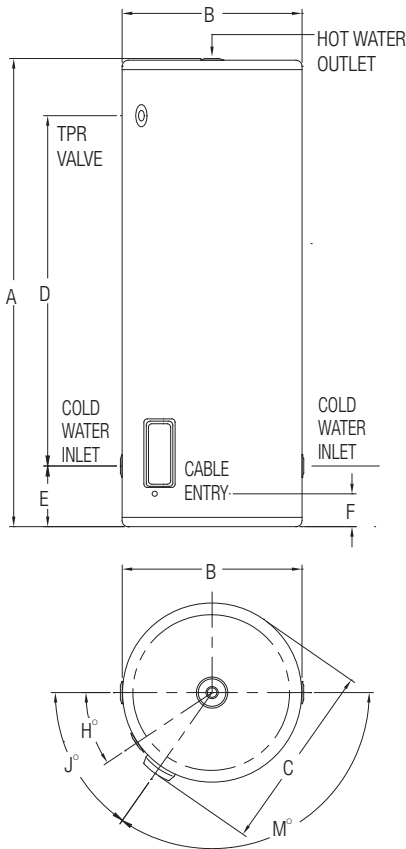

Everhot SS 50L

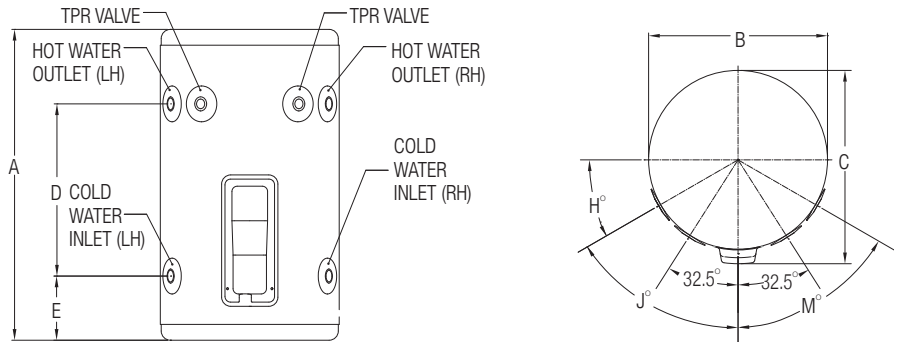

50L models have left and right hand (dual handed - DH) cold water connections, hot water connections, and T&PR valve fittings.
250L-315L models have left and right hand (dual handed - DH) cold water connections, a hot water connection at the top of the water heater and a T&PR valve fitting on the left hand side.

Note: Allow additional top clearance for the hot outlet fittings and pipe work.

1. Everhot Stainless Steel Warranty: 10 Year cylinder warranty, 1 Year parts and labour on all other components for domestic (non-commercial) installations. Condition apply. See the Everhot warranty set out in the Owner's Guide and Installation Instructions or view online at www.reece.com.au/plumbing/products/hotwaterunits/everhot
2. Minimum Energy Performance Standard (MEPS) is a regulated requirement that electric water heaters sold in Australia must meet. Everhot Stainless Steel models perform up to 19% better than MEPS requirement. Performance varies by model, refer to Specification Table for individual models' performance.
3. Up to 40% lighter than comparable Everhot vitreous enamel water heater models of same capacity

SPECIFICATIONS	50 LITRE			250 LITRE			315 LITRE		
	Model	2A1050	2A1250	2A1315	Model	2A1050	2A1250	2A1315	
Hot Water Delivery	Litres	50	250	315					
No. of People (moderate climate)	Continuous Tariff	1-2	3-5	4-6					
No. of People (moderate climate)	Off Peak/ Night rate	N/A	1-3	2-4					
Rating		3.6 kW	3.6 kW	3.6 kW					
Maximum Supply Pressure									
	- with expansion control valve	960 kPa	680 kPa	680 kPa					
	- without expansion control valve	1120 kPa	800 kPa	800 kPa					
Temperature & Pressure Relief Valve (T&PR)		1400 kPa	1000 kPa	1000 kPa					
ECV setting		1200 kPa	850 kPa	850 kPa					
Thermostat setting (Maximum)		80°C	75°C	75°C					
Hot & Cold Water connection		Rp 20 (3/4") Female							
PTR Connections		Rp 15 (1/2") Female							
Better than MEPS by		4.8%	19%	17%					
Weight (empty)	kg	17	45	55					
Dimensions									
	A	695	1440	1760					
	B	400	625	625					
	C	432	630	630					
	D	385	990	1310					
	E	145	230	230					
	F	93	145	145					
	H	30	30	30					
	J	60	60	60					
	M	60	120	120					

Technical data is subject to change.